

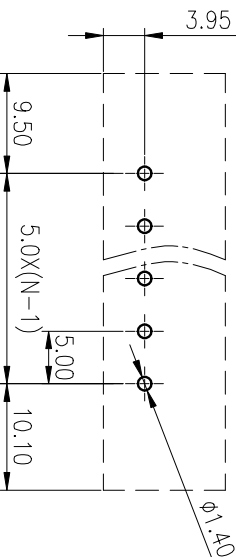
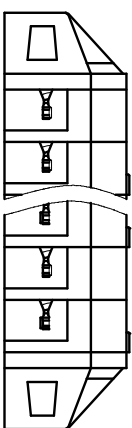


公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)											公差等级/General Tolerances(mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/0													
~	3	6	10	18	30	50	80	120	180	250	315	400	500	±Z													
±0.12		±0.18		±0.22		±0.26		±0.31		±0.37		±0.57		±0.80		±1.05		±1.15		±1.60		±2.20		±2.50			


PCB LAYOUT

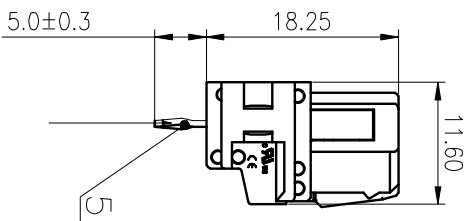

Bending the pin-header after assembling

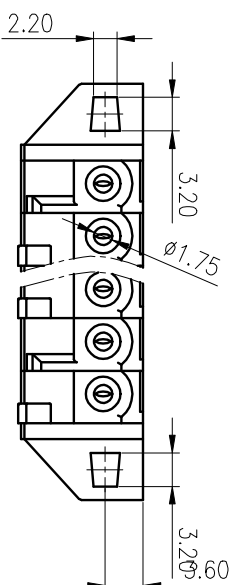

The first pin will bulge to the left



ITEM	NAME OF PART	MATERIAL	NOTES
5	Clamp	Copper alloy	
4	Right housing	PA66	UL94V-0
3	Left housing	PA66	UL94V-0
2	Housing2	PA66	UL94V-0
1	Housing1	PA66	UL94V-0

UL 标准 / UL Standard:		B	C	D
额定电压/电涌 / Rated Voltage(V)/Current(A)	300/15	/	300/10	
IEC 标准 / IEC Standard:				
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III/3	III/2	II/2	
额定电压/电涌 / Rated Voltage(V)/Current(A)	320/20	/	/	/
额定脉冲电压 / Rate Impulse Voltage(KV)	4.0	/	/	/
线径范围(硬线和软线) / Wire Range(rigid and flexible)(mm² / AWG)				/
间距 / Pitch(mm) / 线径范围 / Poles	5.0 / N=02~24P			
剥线长度 / Stripping length(mm)	6~7			
使用温度范围 / Operating Temperature(°C)	-40~+105			
符合 RoHS 环保要求 / Conform to RoHS	Yes			
标准颜色编号 / Standard color number:	PANTONE 428C			
PANTONE / RAL				

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD:	
CHKD:	

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**
 宁波高松电子有限公司

8EDGDM-5.0-XXP-11-01A(H)

DRAWING NO.:	8EDGBM-5.0-C02	REV	T0
TYPE:	CUSTOMER DRAWING	SCALE:	2:1
DRAFT:	WangY1	2020.06.19	

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				
4				
5				
6				