


Pitch Range		In mm		Nominal Dimension		Range		In mm	
Over	6	Over	10	Over	30	Over	60	Over	100
TO	10	TO	24	TO	70	TO	100	TO	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2	

7	Cover	PA66	UL94V-0
6	Cover	PA66	UL94V-0
5	Spring	Stainless steel	
4	Clamp	Copper alloy	Sn plated
3	Side housing 2	PA66	UL94V-0
2	Side housing 1	PA66	UL94V-0
1	Side housing 1	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/10	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	130/10	/	/
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	2.5	/	/
线芯范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~1.5/28~14		
间距/Pitch(mm)/线芯范围/Poles	3.5/N=02~24P		
剥线长度/Stripping length(mm)	6-7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	PANTONE 428C		

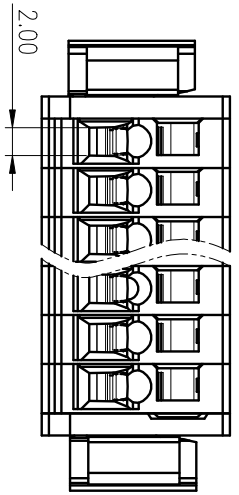

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD:	
CHKD:	
DRAFT:	LYK 2007.10.27
SIZE:	A4
TYPE:	CUSTOMER DRAWING
SCALE:	2:1
REV	TO
SHEET	1/1

DEGSON® 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD
8EDGKG-3.5-XXP-11-01A(H)
 DRAWING NO.: 8EDGKG-3.5-C02
 TYPE: CUSTOMER DRAWING
 SCALE: 2:1
 SHEET 1/1