


公差等级/General Tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12/±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±2

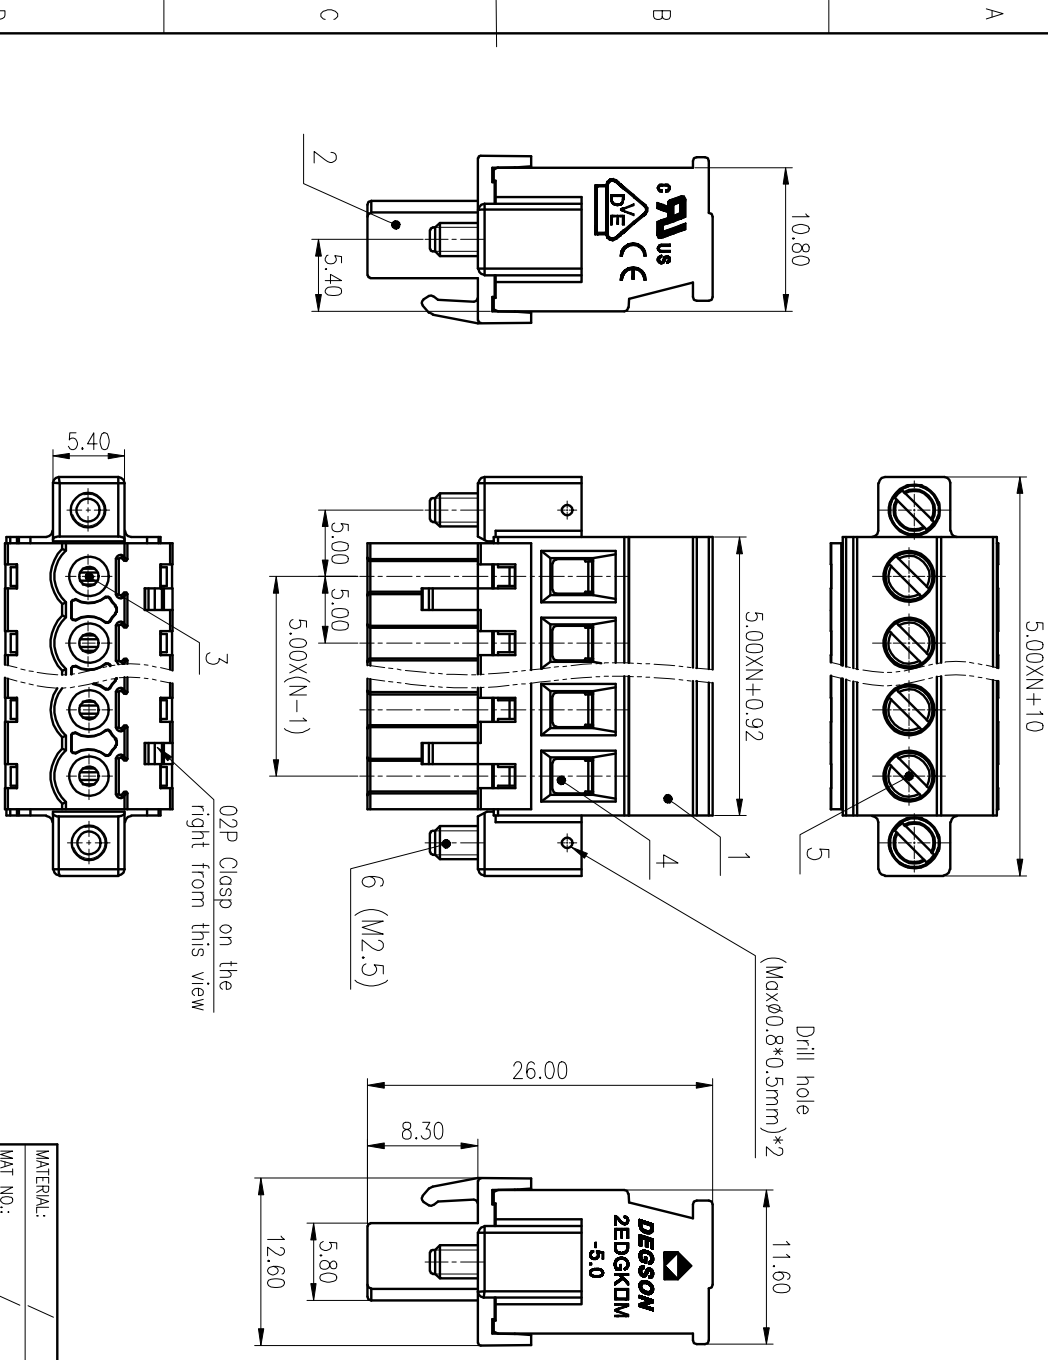

ITEM	NAME OF PART	MATERIAL	NOTES
6	Screw2	Steel	M2.5/7m plated
5	Screw1	Steel	M3/Zn plated
4	Cage	Copper alloy	M3/Ni plated
3	Clamp	Copper alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/2		
额定电压/电涌/Rated Voltage(V)/Current(A)	320/18		
额定脉冲电压 (KV) / 额定冲击电压 (KV)	4		
额定扭矩/Torque Tightening(N·m/Lbin)	M3: 0.59/5.16		
导线范围 (硬导线/软导线) / Wire Range(rigid and flexible)(mm² AWG)	1.0~2.5/28~12		
间距/Pitch(mm) / 极间距/Poles	5.0/02~24P		
剥线长度/Stripping length(mm)	7		
工作温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: Lm CHH 2020.05.29

CHKD:Gong YZh 2020.05.29

DFT: ZhuYP 2019.12.05

DRAWING NO.: ZEDGKAM-5.0-C05

TYPE: CUSTOMER DRAWING

SCALE: 2:1 SHEET 1/1

NAME: **DEGSON** NINGBO DEGSON ELECTRICAL CO., LTD  
**宁波德松电子有限公司**  
 ZEDGKAM-5.0-XXP-1Y-1000A(H)

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				
4				

02P Clasp on the right from this view

Drill hole (Max)ø0.8\*0.5mm)\*2