






公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

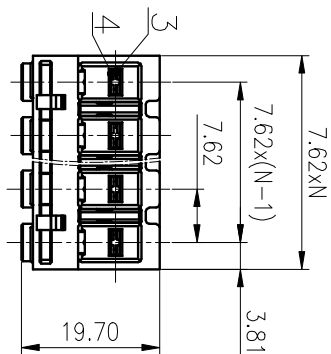

02P:Clasp on the left from this view



ITEM	NAME OF PART	MATERIAL	NOTES
6	Screw	Steel	M3/Zn Plated
5	Cage	Copper alloy	M3/Ni Plated
4	Spring	Stainless steel	/
3	Clamp	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:		B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	600/41	600/41	600/41	600/5
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2	
额定电压/电涌/Rated Voltage(V)/Current(A)	1000/41	1000/41	1000/41	1000/41
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	8	8	8	6
额定扭矩/螺栓和螺线/Torque Tightening(N·m/Lb·in)	M3: 0.8/7.0			
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.5~6.0/24~8(Str),24~10(sol)			
间距/Pitch(mm)/线数范围/Poles	7.62/N=02~12P			
引线长度/Stripping length(mm)	11			
使用温度范围/Operating temperature(°C)	-40~+105			
符合RoHS要求/Conform to RoHS	Yes			

MATERIAL: /

SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: /
 CHKD: /

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**
宁波高松电子有限公司

DRAWING NO.: SEDGKH-7.62-XXP-1Y-02A(H)
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE

A B C D

1 2 3 4 5 6