


精度等级/General Tolerances(mm)		公差等级/General Tolerances(mm)												
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10	
~	~	~	~	~	~	~	~	~	~	~	~	~		±Z
3	6	10	18	30	50	80	120	180	250	315	400	500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

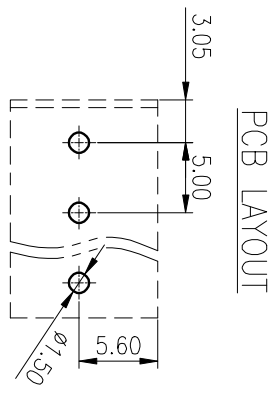

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET
1	2	3	4	5	6	7	8	1/1
MATERIAL: /					SURFACE: /			
MAT NO.: /					NAME: <b>DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD</b>			
STATUS: /					DRAWING NO.: 10001396			
Appd: LanChH 2020.08.10					NAME: <b>DG129-5.0-XXP-1Y-100A(H)</b>			
CHKD: YUJZ 2020.08.10					REV: T0			
DRT: ChenZ 2019.04.04					REV: 1/1			

ITEM	NAME OF PART	MATERIAL	NOTES
1	Pin header	Copper alloy	Sn Plated
2	Cover	PA66	UL94V-0
3	Cage	Copper alloy	M3/Ni Plated
4	Housing	PA66	UL94V-0
5	Screw	Steel	M3/Zn Plated

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/20	/	300/10
IEC 标准/IEC Standard:	III/2		
过压类别/Overvoltage Category/污秽等级/Pollution Degree	III/2		
额定电压/电涌/Rated Voltage(V)/Current(A)	250/20		
工频耐压/Withstanding voltage(kV/1Min)	AC2.0		
转矩/扭距/Torque Tightening(N·m/Lb.in)	M3, 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.5~2.5/26~12		
间距/Pitch(mm)/线数范围/Poles	5.0/N=02~24P		
引线长度/Stripping length(mm)	8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		