
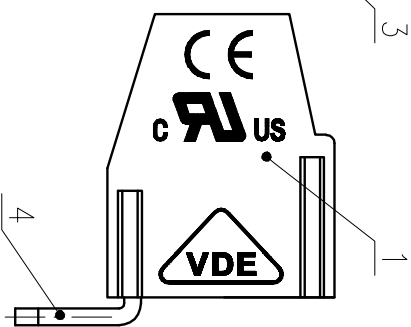
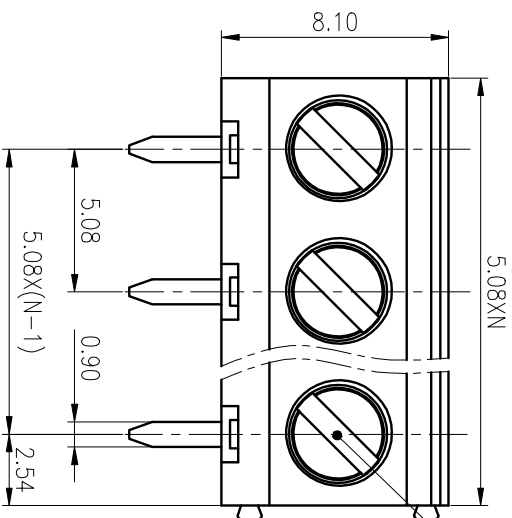
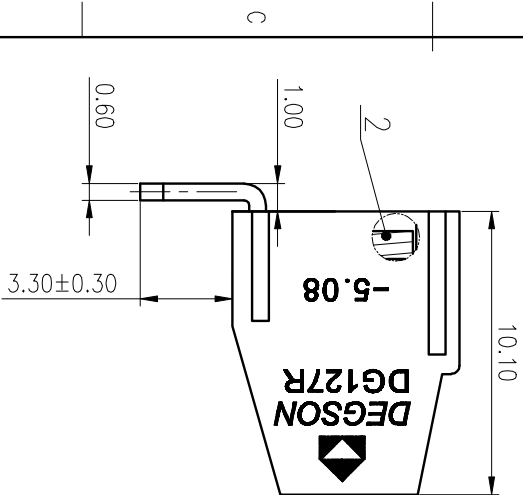
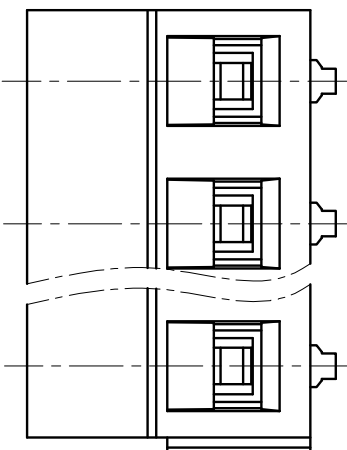


PCB LAYOUT

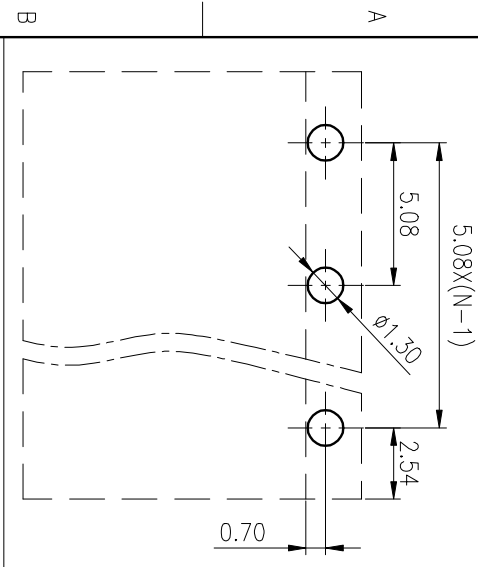

精度等级/General	tolerance(mm)
0	>.3
~	>.6
3	>.10
6	>.18
10	>.30
18	>.50
30	>.80
50	>1.20
80	>1.80
120	>2.50
180	>3.15
250	>4.00
315	>5.00
400	>6.30
500	>8.00
±0.12	±0.18
±0.22	±0.26
±0.31	±0.37
±0.57	±0.80
±0.93	±1.05
±1.15	±1.60
±2.20	±2.50
±Z	±Z

4	Pin Header	Copper Alloy	Sn Plated
3	Screw	Steel	M2.5/Zn Plated
2	Cage	Copper Alloy	M2.5/Ni Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准	UL Standard:	B	C
额定电压/电涌	Rated Voltage(V)/Current(A)	300/12	/
IEC 标准	IEC Standard:	/	/
IEC 类别	IEC Category:	III/2	/
额定电压/电涌	Rated Voltage(V)/Current(A)	/	250/15
工额电压	Withstanding Voltage(KV/min)	AC2000	/
螺丝扭矩	Torque Tightening(N·m/Lb.in)	M2.5:0.4/3.54	/
线径范围	Wire Range(rigid and flexible)(mm ² /AWG)	0.75~1.5/26~14	/
间距/Pitch	Pitch(mm)	5.08	N=02~24P
剥线长度	Stripping length(mm)	6~7	/
使用温度范围	Operating Temperature(°C)	-40~+105	/
符合RoHS要求	Conform to RoHS	Yes	/
标准颜色编号	Standard color number:	/	/
PANTONE	/	/	/

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD:	LiGL 2020.06.24
CHKD:	Mek 2020.06.24
DFT:	MSh 2020.06.24
SIZE:	A4
TYPE:	CUSTOMER DRAWING
SCALE:	4:1
SHEET:	1/1

NINGBO DEGSON ELECTRICAL CO., LTD

DG127R-5.08-XXP-1Y-00A(H)

DRAWING NO.: DG127R-5.08-C01

REV T0

REV	ECN	DESCRIPTION	DFT	DATE

D

1

2

3

4

5

6