
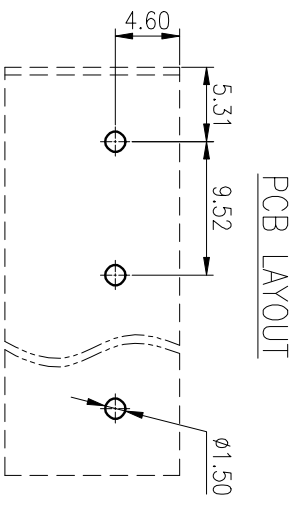
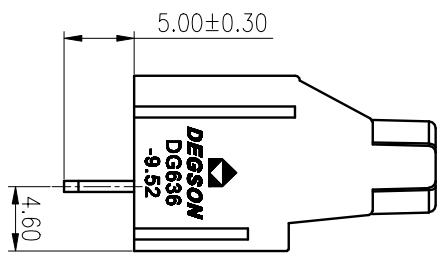
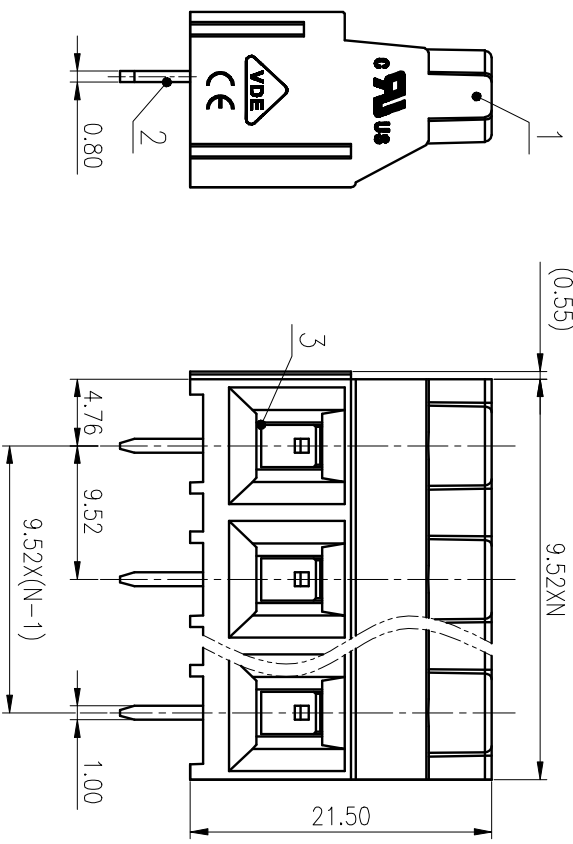


公差等级/General Tolerances(mm)		0.1/1/10	
0	>3	>10	>315
3	~6	~180	~400
6	10	30	500
10	18	50	~500
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50

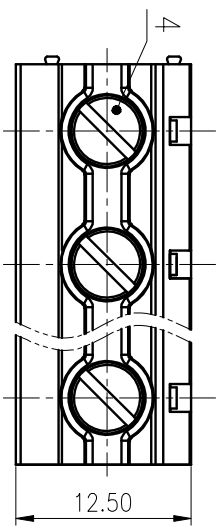

REV	ECN	DESCRIPTION	DRAFT	DATE
MATERIAL: / SURFACE: / MAT NO.: / STATUS: / APPD: LanCH 2020.03.21 CHKD: YUJZ 2020.03.21 DRT: CGM 2017.03.06 NAME: DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD DRAWING NO.: DG636-9.52-C01 TYPE: CUSTOMER DRAWING SCALE: 2:1 SHEET: 1/1				

4	Screw	Steel	M3/Zn Plated
3	Cage	Copper alloy	M3/Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准	UL Standard:	B	C
额定电压/电涌/Rated Voltage(V)/Current(A)	300/30	/	300/10
IEC 标准 /IEC Standard:			
过压类别/Overvoltage Category/污秽等级/Pollution Degree		III/2	
额定电压/电涌/Rated Voltage(V)/Current(A)	1000/32		
工续耐压/Withstanding voltage(V/1Min)	AC3500		
螺栓扭矩/Torque Tightening(N·m/Lbin)	M3, 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~4.0mm ² (str) 0.2~6.0mm ² (sol)		
间距/Pitch(mm)/线数范围/Poles	9.52/N=2~24P		
剥线长度/Stripping length(mm)	8~9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		