

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

**Technical characteristics:**

Specifications  
 DIN EN 60 664  
 DIN EN 61 984




**Inserts**

01. Number of contacts :17
02. Rated Current :10A
03. Rated Voltage :160V
04. Pollution degree :3
05. Rated impulse voltage :2.5kV
06. Insulation resistance : $\geq 10^9 \Omega$
07. Material:Polycarbonate
08. Rated voltage acc. to UL/CSA:250V
09. Limiting temperatures : $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
10. Flammability acc. to UL94:V0
11. Mechanical working life (mating cycles) : $\geq 500$

**Contacts**

01. Material:Copper alloy
02. Surface:hard-gold/silver plated
03. Contact resistance : $\leq 3\text{m}\Omega$
04. Terminal :Crimp terminal
05. Wire gauge :0.14-2.5mm<sup>2</sup> (AWG #26-14)
06. Rohs Compliance

Note:Crimp contact pins should order separately

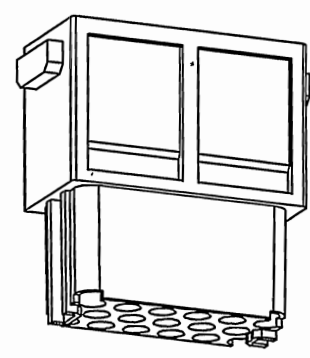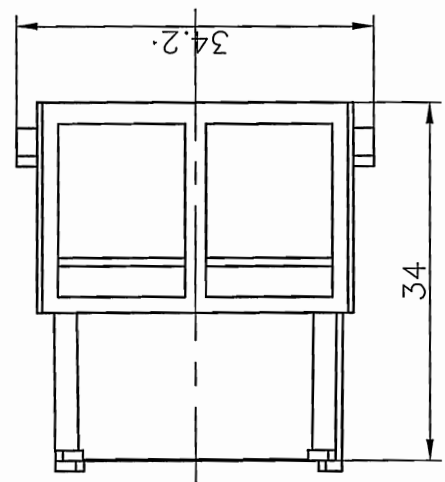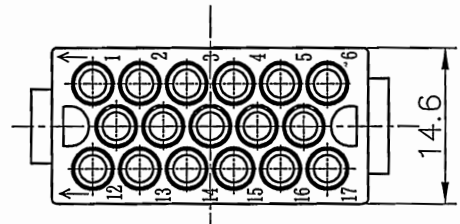

PART NO.: /		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
APPD: HJS 2016.8.17	NAME: DMD-017-FC		
CHKD: Ljm 2016.9.28	TITLE: CUSTOMER DRAWING		
DRFT: yang 2016.08.22	REV	DO-1	
DRAWING NO.: DMD-017-FC-E01		SHEET	1/1
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE
			1.5:1

DETACHED LISTS