
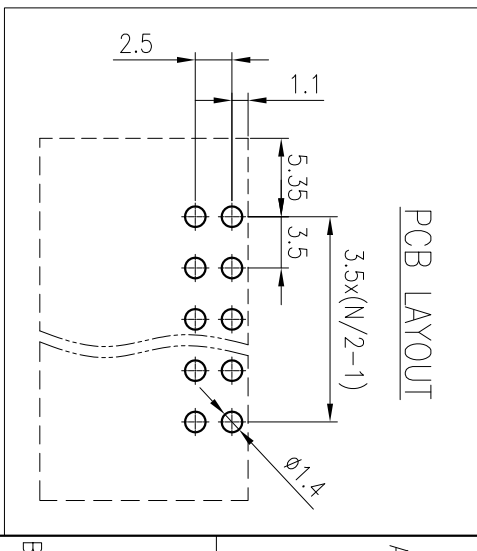

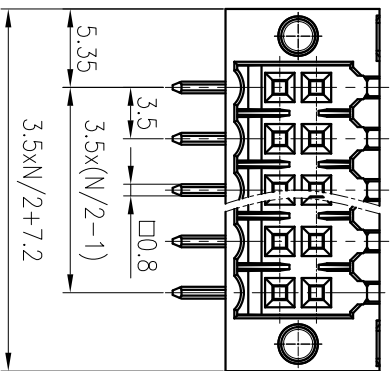
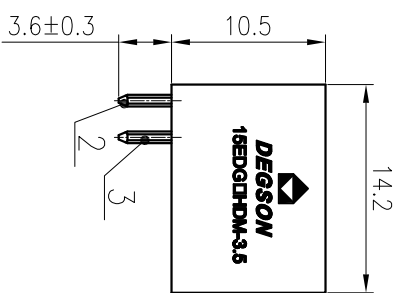


公差/General Tolerances(mm)		公差/General Tolerances(mm)	
0	>3	>6	>18
~3	~6	~10	~30
~6	~10	~18	~50
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.03	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
0.1/10	0.1/10	0.1/10	0.1/10
±2	±2	±2	±2

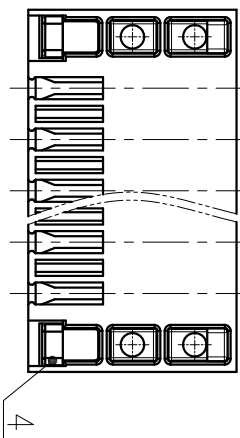

4	Nut	Steel	M2/Zn plated
3	Pin 1	Copper	Sn Plated
2	Pin 2	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)	150/10	/	/
EC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	80/10	125/10	250/10
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5	2.5	2.5
间距/Pitch(mm)/线数范围/Poles	3.5	N=4~48P	
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: /
SURFACE: /

NAME: **DEGSON** 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

APPD: Lon CHH 2021.01.09
CHKD: Yu JZh 2021.01.09
NAME: 15EDGRHDM-3.5-XXP-1Y-100A(H)

REV	ECN	DESCRIPTION	DRFT	DATE	SIZE: A4	SCALE: 2:1	REV	SHEET
T1		Drawing update	Bo YH	2021.01.09	mm (inch)		T1	1/1